
INLINE SPRING CHECK VALVES

Full Floating Clapper Assembly





- •Rated @ 200 psi
- •Horizontal or Vertical installation
- •Brass Construction with an O-Ring Seat and Spring Loaded Clapper

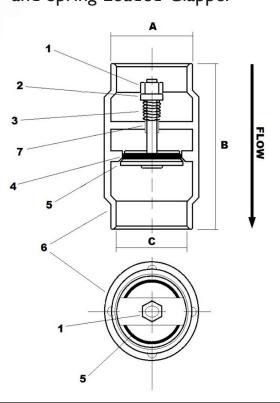

MATERIALS

1			
1	Nut	Stainless Steel	
2	Spring Cap	Stainless Steel	
3	Spring	Stainless Steel	ITE
4	O-Ring	Rubber	652
5	Clapper	Brass	652
6	Body	Brass	652
7	Washer	PTFE	652

DIMENSIONS							
EM #	SIZE	А	В				
520140	1" IPS	1-9/16"	1-3/16"				
520145	1-1/4" IPS	2"	1-9/16"				
520150	1-1/2" IPS	2-1/8"	1-3/4"				
520151	2" IPS	2-3/4"	2-3/16"				

System No.	Location	Spec Section	Paragraph	
Submitted By	Date	Approved	Date	

