


Top Beam Clamp

Steel



TOP BEAM CLAMP

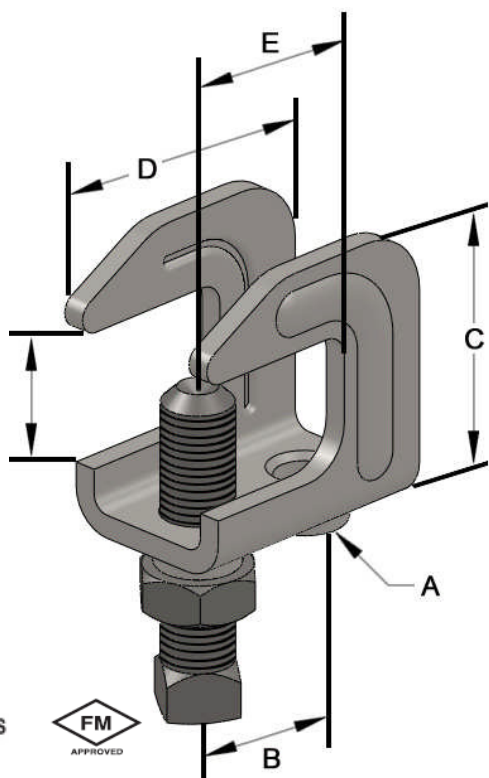

Function: Designed for attaching hanger rod to the top flange of a beam or bar joist, where the flange thickness does not exceed 3/4 inch (19.05mm). The open U design permits rod adjustment.

Approvals: Underwriters' Laboratories Listed in the U.S.(UL), Canada (CUL) and Factory Mutual Approved. Complies with Federal Specifications A-A-1192A (Type19) and Manufacturers' Standardization Society ANSI/SP-69 and ANSI/SP-58 (Type19).

Material: Low Carbon Steel with hardened steel cup point set screw

Finish: Electro-galvanized

Ordering: Specify figure number.

Set Screw Torque			Caution should be taken not to over tighten the set screw
Nominal Thread Size		3/8	
Rec. Torque	in-lbs	60	
	N-m	(6.8)	

Rod Size A	B		C		D		E		Max. Pipe Size		Max. Rec. Load		Wt. Each	
											lbs.	kN		
3/8	3/4	(19.05)	1-9/16	(39.69)	1-1/2	(38.10)	9/16	(14.29)	4	(100)	610	(2.71)	.20	(.09)

***Note:** When a torque wrench is unavailable, the set screw should be tightened so it contacts the I-beam and then an additional 1/4 to 1/2 turn added.*

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	